


Sizes		CHOPOK LE 100 VD 1070/760	
1	A		1070
2	F	mm	1735
3	C	mm	610
4	DN	Ø mm	250
5	B	mm	760
6	FF	mm	1970
7	V	mm	1180
8	AA	mm	
9	H	mm	600
10	J	mm	325 + /160/
11	K	Ø mm	4x125
12	L	Ø mm	150
13	M	mm	20
14	N	mm	

Basic design:

Thermodynamic Hearth
 Segment chamotte lining SO
 Glass Classic
 Inox control grip-handle MP2
 Environmentally friendly varnish

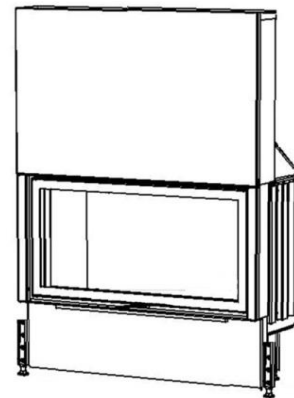

Technical parameters			
1	Nominal heat output	kW	14,0
2	Pressure required	Pa	12
3	Average efficiency	%	79,3
4	Average flue gas temperature	°C	251
5	Wood consumption	kg/h	4,6
6	Consumption of combustion air	m ³ /hod	42
7	Emission of CO to 13% O ₂	%	0,1
8	Flue gas mass flow	g/s	13,3
9	Weight	kg	500
10	Required min. cross section for circulating air - INPUT	cm ²	425
11	Required min. cross section for circulating air - OUTPUT	cm ²	700
12	Three-component insulated chimney - active height 8 m	Ø cm	200
13	Character of building construction with fireplace insert	warm air convection	Yes
		heat storage without conv	No

Optional accessories:

Cover frame (KR)
 Glass Reflex (SR)
 Black printed glass (SM)
 Double glass Modern (DSM)
 Lower hearth (ZO)
 External ashtray (VOP)
 Convective casing (DP)
 Rear feeding door (PD)
 Vertical heat-storing panel (AZ)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk