


	Sizes	CHOPOK LE 90 VD 970/710	
1	A	970	
2	F	mm	1685
3	C	mm	610
4	DN	Ø mm	200
5	B	mm	710
6	FF	mm	1920
7	V	mm	1080
8	AA	mm	
9	H	mm	535
10	J	mm	325 + /160/
11	K	Ø mm	4x125
12	L	Ø mm	125
13	M	mm	20
14	N	mm	

**Basic design:**

Thermodynamic Hearth  
 Segment chamotte lining SO  
 Glass Classic  
 Inox control grip-handle MP2  
 Enviromentally friendly varnish

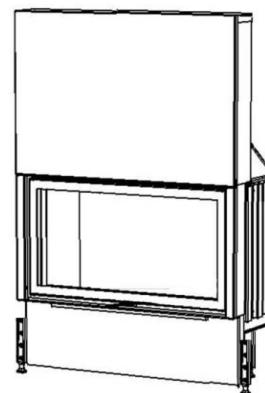

Technical parameters			
1	Nominal heat output	kW	13,0
2	Pressure required	Pa	12
3	Average efficiency	%	78,1
4	Average flue gas temperature	°C	268
5	Wood consuption	kg/h	4,2
6	Consumption of combustion air	m <sup>3</sup> /hod	39
7	Emission of CO to 13% O2	%	0,1
8	Flue gas mass flow	g/s	12,7
9	Weight	kg	430
10	Required min. cross section for circulating air - INPUT	cm <sup>2</sup>	400
11	Required min. cross section for circulating air - OUTPUT	cm <sup>2</sup>	650
12	Three-component insulated chimney - active height 7 m	Ø cm	200
13	Character of building construction with fireplace insert	warm air convection	Yes
		heat storage without conv	No

**Optional accessories:**

Cover frame (KR)  
 Glass Reflex (SR)  
 Black printed glass(SM)  
 Double glass Modern(DSM)  
 Lower hearth (ZO)  
 External ashtray (VOP)  
 Convectonal casing (DP)  
 Rear feeding door (PD)  
 Vertical heat-storing panel (AZ)  
 Heat accumulation quadrant (APO)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk