


Sizes			CHOPOK O 100 VD 1070/450	CHOPOK O 100 VD 1070/510	CHOPOK O 100 VD 1070/570
1	A	mm	1070		
2	F	mm	1350	1410	1470
3	C	mm	620		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	1180		
8	AA	mm	1000		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	150		
13	M	mm	20		
14	N	mm	50		

**Basic design:**

Thermodynamic Hearth  
 Segment chamotte lining (SO)  
 Glass Classic  
 Inox control grip-handle MP2, RP2  
 1 x VD, 1 x LD  
 Enviromentally friendly varnish

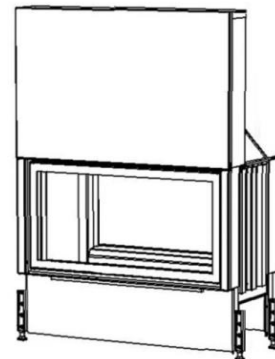

Technical parameters			
1	Nominal heat output	kW	13,5
2	Pressure required	Pa	12
3	Average efficiency	%	78,9
4	Average flue gas temperature	°C	263
5	Wood consuption	kg/h	4,3
6	Consumption of combustion air	m3/h	41
7	Emission of CO to 13% O2	%	0,1
8	Flue gas mass flow	g/s	13,6
9	Weight	kg	370
10	Required min. cross section for circulating air - INPUT	cm <sup>2</sup>	425
11	Required min. cross section for circulating air - OUTPUT	cm <sup>2</sup>	675
12	Three-component insulated chimney - active height 7 m	Ø cm	200
13	Character of building construction with fireplace insert	warm air convection	Yes
		heat storage without conv	No

**Optional accessories:**

Cover frame (KR)  
 Glass Reflex (SR)  
 Black printed glass(SM)  
 Black printed glass Reflex (SMR)  
 External ashtray (VOP)  
 Lower hearth (ZO)  
 Convectional casing (DP)  
 Vertical heat-storing panel (AZ)  
 Lift up door (2 x VD)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk