


combustion air inlet

Sizes		CHOPOK O 110 VD 1170/450	CHOPOK O 110 VD 1170/510	CHOPOK O 110 VD 1170/570	
1	A	mm	1170		
2	F	mm	1350	1410	1470
3	C	mm	620		
4	DN	Ø mm	225		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	1280		
8	AA	mm	1100		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	150		
13	M	mm	20		
14	N	mm	50		

Basic design:

Thermodynamic Hearth
 Segment chamotte lining (SO)
 Glass Classic
 Inox control grip-handle MP2, RP2
 1 x VD, 1 x LD
 Environmentally friendly varnish

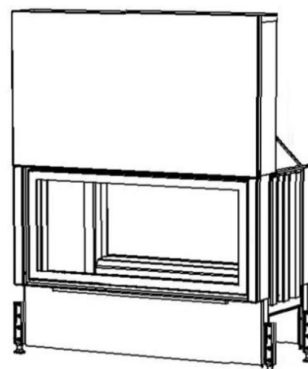

Technical parameters			
1	Nominal heat output	kW	15,0
2	Pressure required	Pa	12
3	Average efficiency	%	79,3
4	Average flue gas temperature	°C	256
5	Wood consumption	kg/h	4,7
6	Consumption of combustion air	m ³ /h	45
7	Emission of CO to 13% O ₂	%	0,1
8	Flue gas mass flow	g/s	13,3
9	Weight	kg	400
10	Required min. cross section for circulating air - INPUT	cm ²	450
11	Required min. cross section for circulating air - OUTPUT	cm ²	750
12	Three-component insulated chimney - active height 7 m	Ø cm	200
13	Character of building construction with fireplace insert	warm air convection	Yes
		heat storage without conv	No

Optional accessories:

Cover frame (KR)
 Glass Reflex (SR)
 Black printed glass (SM)
 Black printed glass Reflex (SMR)
 External ashtray (VOP)
 Lower hearth (ZO)
 Convectional casing (DP)
 Vertical heat-storing panel (AZ)
 Lift up door (2 x VD)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk