



Sizes			CHOPOK R90 60 VD 650/450- S/380(L/P)	CHOPOK R90 60 VD 650/510- S/380(L/P)	CHOPOK R90 60 VD 650/570- S/380(L/P)
1	A	mm	650		
2	F	mm	1300	1360	1420
3	C	mm	480		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	R	mm	380		
8	V	mm	715		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	2x125		
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm			

**Basic design:**

Thermodynamic Hearth  
Segment chamotte lining (SO)  
Glass Classic  
Inox control grip-handle MP2  
Environmentally friendly varnish



CHOPOK R90 -S/380 P



CHOPOK R90 -S/380 L

Technical parameters			
1	Nominal heat output	kW	9,0
2	Pressure required	Pa	12
3	Average efficiency	%	84,3
4	Average flue gas temperature	°C	224
5	Wood consumption	kg/h	3
6	Consumption of combustion air	m <sup>3</sup> /h	27
7	Emission of CO to 13% O <sub>2</sub>	%	0,1
8	Flue gas mass flow	g/s	7,3
9	Weight	kg	250
10	Required min. cross section for circulating air - INPUT	cm <sup>2</sup>	275
11	Required min. cross section for circulating air - OUTPUT	cm <sup>2</sup>	450
12	Three-component insulated chimney - active height 6 m	Ø cm	160
13	Character of building construction with fireplace insert	warm air convection	Yes
		heat storage without conv	No


**Optional accessories:**

Cover frame (KR)  
Glass Reflex (SR)  
Black printed glass (SM)  
Black printed glass Reflex (SMR)  
External ashtray (VOP)  
Lower hearth (ZO)  
Rear feeding door (PD)  
Vertical heat-storing panel (AZ)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

 KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from [www.KOBOK.sk](http://www.KOBOK.sk)

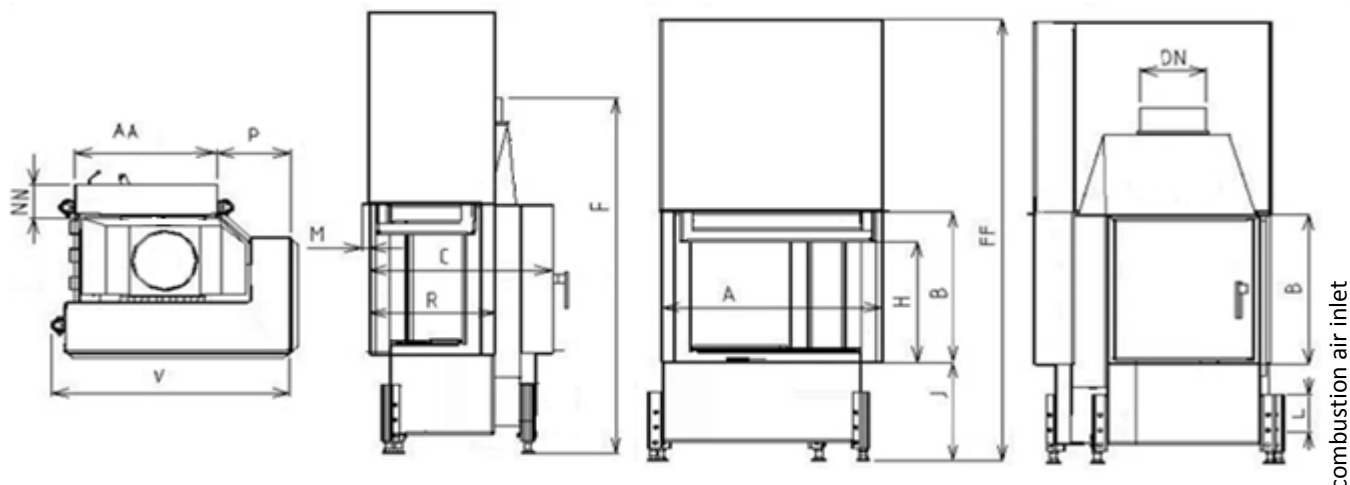

Sizes		CHOPOK R90 60 VD 650/450-S/380(L/P) PD 410/450	CHOPOK R90 60 VD 650/510-S/380(L/P) PD 410/510	CHOPOK R90 60 VD 650/570-S/380(L/P) PD 410/570	
1	A	mm	650		
2	F	mm	1250	1310	1370
3	C	mm	550		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	P	mm	200		
7	R	mm	380		
8	AA	mm	410		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	FF	mm	1350	1470	1590
12	L	Ø mm	125		
13	NN	mm	70		
14	V	mm	705		

**Basic design:**


Thermodynamic hearth

Vertical fireclay VS


Glass classic

Stainless steel control grip-handle MP2

Environmentally friendly varnish



CHOPOK R90 -S/330 P PD 410



CHOPOK R90 -S/330 L PD 410

Technical parameters			
1	Nominal heat output	kW	9
2	Pressure required	Pa	12
3	Average efficiency	%	84,3
4	Average flue gas temperature	°C	224
5	Wood consumption	kg/h	3
6	Consumption of combustion air	m <sup>3</sup> /h	27
7	Emission of CO to 13% O <sub>2</sub>	%	0,1
8	Flue gas mass flow	g/s	7,3
9	Weight	kg	280
10	Required min. cross section for circulating air - INPUT	cm <sup>2</sup>	275
11	Required min. cross section for circulating air - OUTPUT	cm <sup>2</sup>	450
12	Three-component insulated chimney - active height 4 m	Ø cm	160
13	character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv.	no

**Optional accessories:**

Cover frame (KR)

Black printed glass(SM)

Lower hearth (ZO)

Convectional casing (DP)

Divided door (LD2)