

	Sizes		EKO O 60 LD 600/400	EKO O 60 LD 600/450
	1	A	mm	600
2	F	mm	915	965
3	C	mm	450	
4	DN	Ø mm	160	
5	B	mm	400	450
6	V	mm	710	
7	R	mm		
8	AA	mm		
9	H	mm		
10	J	mm	350 + /100/	
11	K	Ø mm	4x125	
12	L	Ø mm	125	
13	M	mm		
14	N	mm	50	


Basic accessories:

Thermodynamical hearth
 Segmental chamotte lining
 Glass classic
 Inox door-handle RP2,RP1,RP1A
 Coated with ecological paint

Optional accessories:

Convection casing (DP)
 Vertical heat-storing panel (AZ)
 Heat accumulation quadrant (APO)
 Lava basket (KL)
 Glass Reflex (SR)
 Glass Modern (SM)
 Cover frame (KR)

Technical parameters			
1	Nominal heat output	kW	9,5
2	Pressure required	Pa	12
3	Average efficiency	%	75,4
4	Average flue gas temperature	°C	258
5	Wood consuption	kg/h	3,2
6	Consumption of combustion air	m ³ /h	29
7	Emission of CO to 13% O2	%	0,1
8	Flue gas mass flow	g/s	12,5
9	Weight	kg	160
10	Required min. cross section for circulating air - INPUT	cm ²	300
11	Required min. cross section for circulating air - OUTPUT	cm ²	475
12	Three-component insulated chimney - active height 4 m	Ø cm	160
13	Character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv	yes

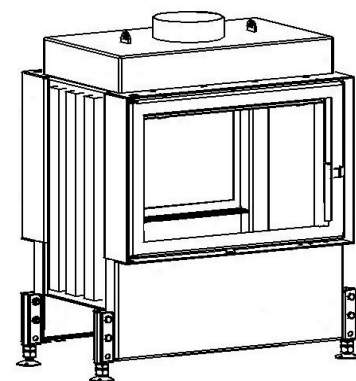

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: STN EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

 KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk