

		Sizes		EKO O 67 LD 670/400	EKO O 67 LD 670/450
1	A	mm		670	
2	F	mm		915	965
3	C	mm		450	
4	DN	Ø mm		160	
5	B	mm		400	450
6	V	mm		780	
7	R	mm			
8	AA	mm			
9	H	mm			
10	J	mm		350 + /100/	
11	K	Ø mm		4x125	
12	L	Ø mm		125	
13	M	mm			
14	N	mm		50	


Basic accessories:

Thermodynamical hearth
Segmental chamotte lining
Glass classic
Inox door-handle RP2,RP1,RP1A
Coated with ecological paint

Optional accessories:

Convection casing (DP)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)
Lava basket (KL)
Glass Reflex (SR)
Glass Modern (SM)
Cover frame (KR)

Technical parameters			
1	Nominal heat output	kW	9
2	Pressure required	Pa	12
3	Average efficiency	%	77,7
4	Average flue gas temperature	°C	273
5	Wood consuption	kg/h	2,7
6	Consumption of combustion air	m ³ /h	27
7	Emission of CO to 13% O2	%	0,1
8	Flue gas mass flow	g/s	9,4
9	Weight	kg	180
10	Required min. cross section for circulating air - INPUT	cm ²	275
11	Required min. cross section for circulating air - OUTPUT	cm ²	450
12	Three-component insulated chimney - active height 4 m	Ø cm	160
13	Character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv	yes

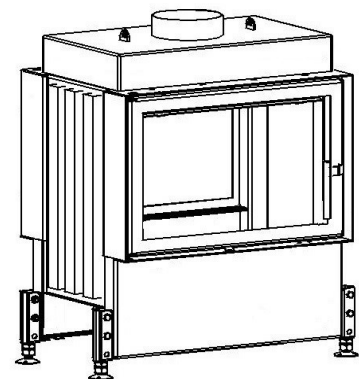

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: STN EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

 KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk