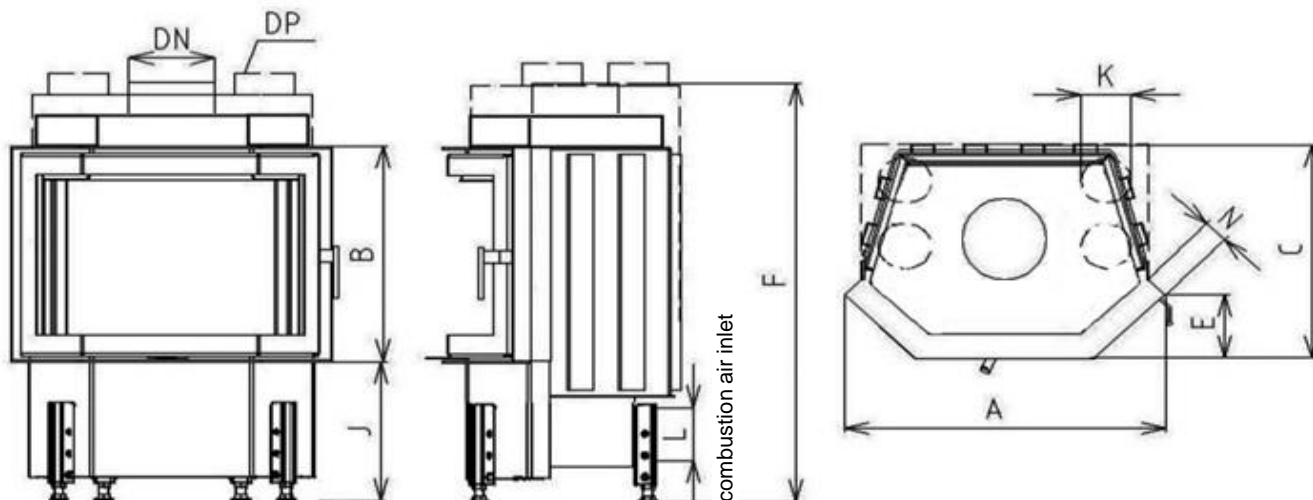
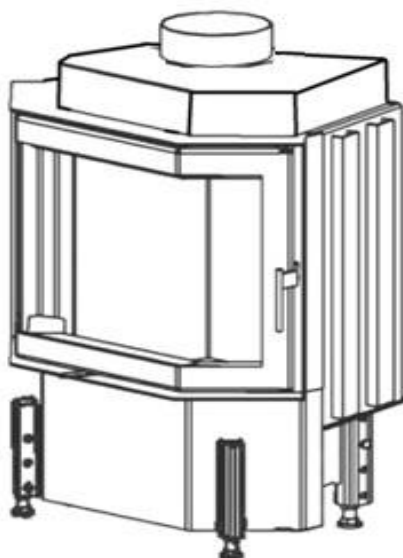


KAZETA P 78 LD 780/570

Low-energy range 78

Low-energy fireplace insert


| Sizes | | | KAZETA P 78 LD 780/570 |
|-------|----|------|---------------------------|
| 1 | A | mm | 780 |
| 2 | F | mm | 1080 |
| 3 | C | mm | 535 |
| 4 | DN | Ø mm | 200 |
| 5 | B | mm | 570 |
| 6 | OR | mm | |
| 7 | E | mm | 175 |
| 8 | AA | mm | |
| 9 | H | mm | |
| 10 | J | mm | 325 + /160/ |
| 11 | K | Ø mm | 4x125 |
| 12 | L | Ø mm | 125 |
| 13 | M | mm | |
| 14 | N | mm | 50 |


Basic design:

Thermodynamic Hearth
 Segment chamotte lining
 Glass Classic
 Inox control grip-handle RP2
 Enviromentally friendly varnish

| Technical parameters | | | |
|----------------------|--|---------------------------|------|
| 1 | Nominal heat output | kW | 7,0 |
| 2 | Pressure required | Pa | 12 |
| 3 | Average efficiency | % | 77,8 |
| 4 | Average flue gas temperature | °C | 273 |
| 5 | Wood consuption | kg/h | 2,2 |
| 6 | Consumption of combustion air | m ³ /hod | 21 |
| 7 | Emission of CO to 13% O ₂ | % | 0,1 |
| 8 | Flue gas mass flow | g/s | 7,6 |
| 9 | Weight | kg | 205 |
| 10 | Required min. cross section for circulating air - INPUT | cm ² | 225 |
| 11 | Required min. cross section for circulating air - OUTPUT | cm ² | 350 |
| 12 | Three-component insulated chimney - active height 6 m | Ø cm | 180 |
| 13 | Character of building construction with fireplace insert | warm air convection | Yes |
| | | heat storage without conv | Yes |

Optional accessories:

Cover frame (KR)
 External ashtray (VOP)
 Lower hearth (ZO)
 Convectonal casing (DP)
 Rear feeding door (PD)
 Vertical heat-storing panel (AZ)
 Heat accumulation quadrant (APO)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk