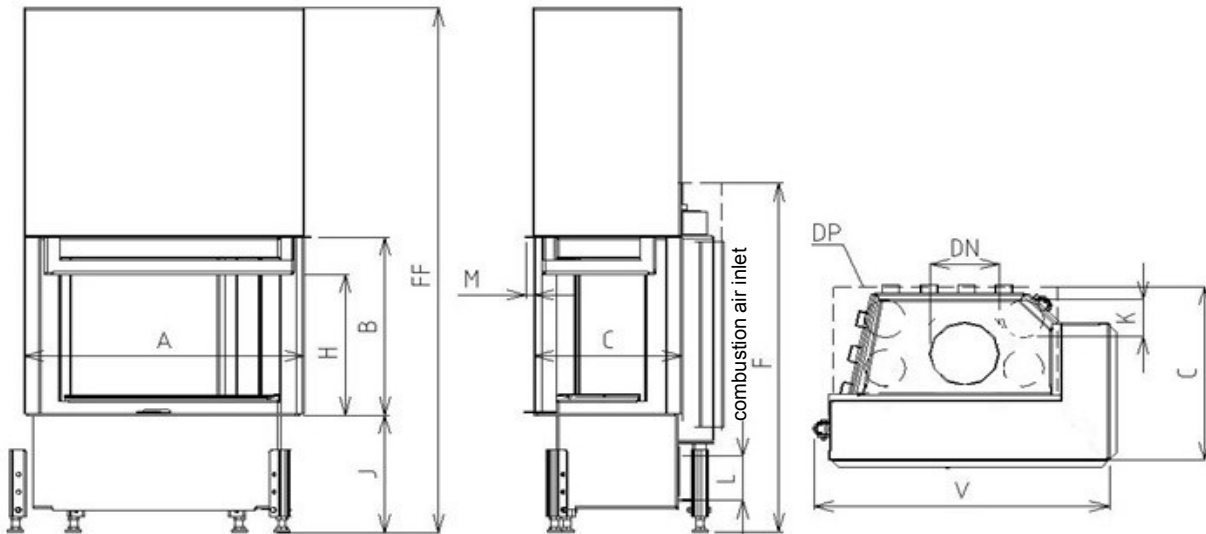


**KAZETA R90 73 VD 780/450,510-S/380 (L/P)**


Low-energy range 73

**Low-energy fireplace insert**



Sizes			KAZETA R90 73 VD 780/450- S/380 (L/P)	KAZETA R90 73 VD 780/510- S/380 (L/P)
1	A	mm	780	
2	F	mm	1060	1120
3	C	mm	480	
4	DN	Ø mm	180	
5	B	mm	450	510
6	FF	mm	1350	1470
7	R	mm	380	
8	V	mm	835	
9	H	mm	315	375
10	J	mm	325 + /160/	
11	K	Ø mm	4x125	
12	L	Ø mm	125	
13	M	mm	20	
14	N	mm		

**Basic design:**

Thermodynamic Hearth  
 Segment chamotte lining  
 Glass Classic  
 Inox control grip-handle MP2  
 Environmentally friendly varnish



KAZETA R90-S/380 P VD



KAZETA R90-S/380 L VD

Technical parameters			
1	Nominal heat output	kW	6,5
2	Pressure required	Pa	12
3	Average efficiency	%	77,7
4	Average flue gas temperature	°C	266
5	Wood consuption	kg/h	2,1
6	Consumption of combustion air	m <sup>3</sup> /hod	19,5
7	Emission of CO to 13% O2	%	0,1
8	Flue gas mass flow	g/s	7,2
9	Weight	kg	270
10	Required min. cross section for circulating air - INPUT	cm <sup>2</sup>	200
11	Required min. cross section for circulating air - OUTPUT	cm <sup>2</sup>	325
12	Three-component insulated chimney - active height 5 m	Ø cm	180
13	Character of building construction with fireplace insert	warm air convection	Yes
		heat storage without conv	No


**Optional accessories:**

Cover frame (KR)  
 Glass Reflex (SR)  
 Black printed glass(SM)  
 Black printed glass Reflex (SMR)  
 External ashtray (VOP)  
 Lower hearth (ZO)  
 Rear feeding door (PD)  
 Vertical heat-storing panel (AZ)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

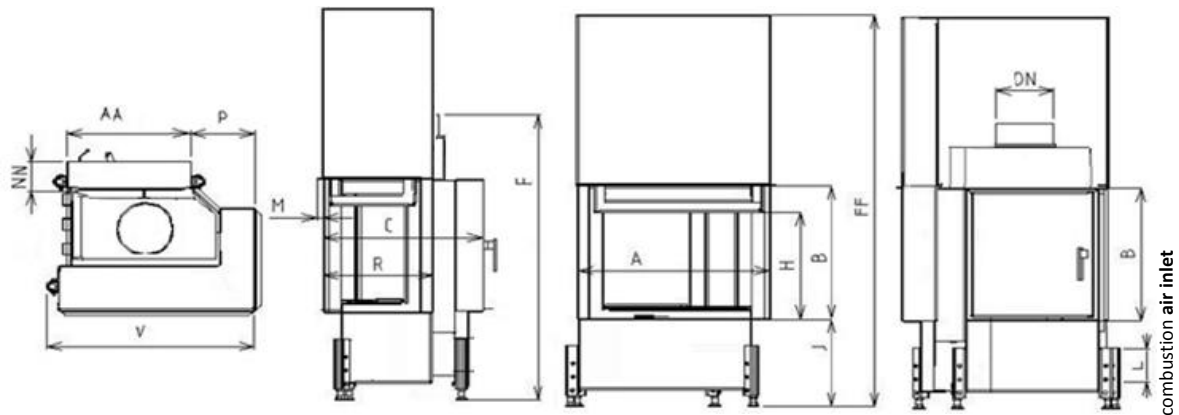
**Low-energy fireplace insert**


Technical parameters			
1	Nominal heat output	kW	6,5
2	Pressure required	Pa	12
3	Average efficiency	%	77,7
4	Average flue gas temperature	°C	266
5	Wood consumption	kg/h	2,1
6	Consumption of combustion air	m <sup>3</sup> /h	19,5
7	Emission of CO to 13% O <sub>2</sub>	%	0,1
8	Flue gas mass flow	g/s	7,2
9	Weight	kg	375
10	Required min. cross section for circulating air - INPUT	cm <sup>2</sup>	200
11	Required min. cross section for circulating air - OUTPUT	cm <sup>2</sup>	325
12	Three-component insulated chimney - active height 5 m	Ø cm	180
13	character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv.	no


**Optional accessories:**

- Cover frame (KR)
- Black printed glass(SM)
- Lower hearth (ZO)
- Convectonal casing (DP)
- Heat accumulation quadrant (APO)

	Sizes		KAZETA R90 73	KAZETA R90 73
			VD 780/450- S/380 (L/P) PD 540/450	VD 780/510- S/330 (L/P) PD 540/510
1	A	mm	780	
2	F	mm	1060	1120
3	C	mm	600	
4	DN	Ø mm	180	
5	B	mm	450	510
6	P	mm	200	
7	R	mm	380	
8	AA	mm	540	
9	P	mm	200	
10	J	mm	325 + /160/	
11	FF	mm	1350	1470
12	L	Ø mm	125	
13	NN	mm	150	
14	H	mm	315	375
15	V	mm	835	

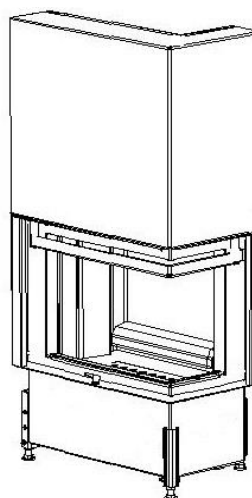

KAZETA R90-S/380 P PD 540

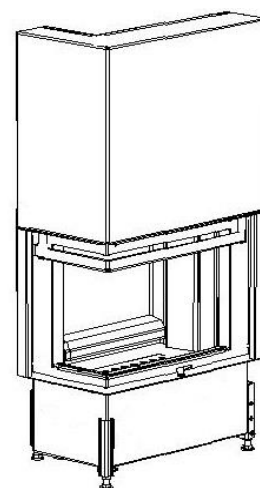

KAZETA R90-S/380 L PD 540

Test Method : ČSN EN 1322/A2:2007, FrpEN16510-1, FrpEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

 KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from [www.KOBOK.sk](http://www.KOBOK.sk)