

Sizes		VERTIKAL 500	VERTIKAL 750	VERTIKAL 1000	for DN 200
1	A	mm	510		550
2	F	mm	620	870	1120
3	DN 1	mm	160		
4	DN 2	Ø mm	180		200
5	B	mm	290		310
6	V	mm	310		330
7	R	mm	300		


Základné prevedenie:

1x inlet, 1x outlet
 Cleaing hole side
 Environmentally friendly varnish

Technical parameters			
1	Nominal heat output	VERTIKAL 500	kW 2,5
2		VERTIKAL 750	kW 3,2
3		VERTIKAL 1000	kW 4
4	Pressure required		Pa 12
5	Weight	VERTIKAL 500	kg 35
6		VERTIKAL 750	kg 50,0
7		VERTIKAL 1000	kg 65
13	character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv.	yes

Optional accessories:

Heating flap
 4x input
 Bottom cleaning hole
 Vertical heat-storing panel (AZ)

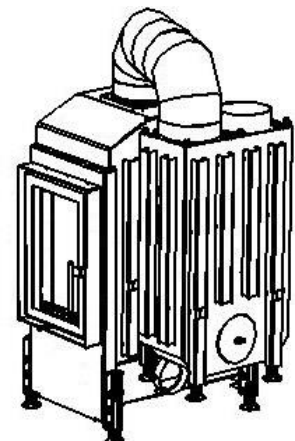

Test Method : ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk