


Sizes		CHOPOK 2R90 67 VD 695/450- S/500	CHOPOK 2R90 67 VD 695/510- S/500	CHOPOK 2R90 67 VD 695/570- S/500	
1	A	mm	680		
2	F	mm	1350	1410	1470
3	C	mm	500		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	R	mm	500		
8	AZ	mm	695		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm			
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm			

**Basic design:**

Thermodynamic Hearth  
Segment chamotte lining (SO)  
Glass Classic  
Inox control grip-handle MP2  
Environmentally friendly varnish

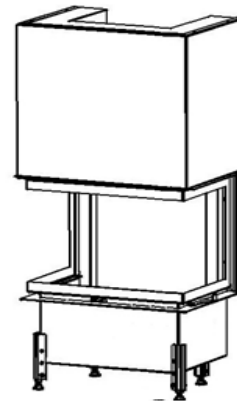

Technical parameters			
1	Nominal heat output	kW	10,0
2	Pressure required	Pa	12
3	Average efficiency	%	76,5
4	Average flue gas temperature	°C	276
5	Wood consumption	kg/h	3,2
6	Consumption of combustion air	m <sup>3</sup> /h	30
7	Emission of CO to 13% O <sub>2</sub>	%	0,1
8	Flue gas mass flow	g/s	11
9	Weight	kg	275
10	Required min. cross section for circulating air - INPUT	cm <sup>2</sup>	300
11	Required min. cross section for circulating air - OUTPUT	cm <sup>2</sup>	500
12	Three-component insulated chimney - active height 5 m	Ø cm	180
13	Character of building construction with fireplace insert	warm air convection	Yes
		heat storage without conv	No

**Optional accessories:**

Cover frame (KR)  
Glass Reflex (SR)  
Black printed glass (SM)  
Black printed glass Reflex (SMR)  
External ashtray (VOP)  
Vermiculite lining (VO)  
Lower hearth (ZO)  
Vertical heat-storing panel (AZ)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from [www.KOBOK.sk](http://www.KOBOK.sk)