


Sizes		CHOPOK 2R90 73 VD 755/450- S/380		CHOPOK 2R90 73 VD 755/510- S/380		CHOPOK 2R90 73 VD 755/570- S/380	
1	A	mm	740				
2	F	mm	1350	1410	1470		
3	C	mm	500				
4	DN	Ø mm	180				
5	B	mm	450	510	570		
6	FF	mm	1350	1470	1590		
7	R	mm	380				
8	AZ	mm	755				
9	H	mm	315	375	435		
10	J	mm	325 + /160/				
11	K	Ø mm					
12	L	Ø mm	125				
13	M	mm	20				
14	N	mm					

Basic design:

Thermodynamic Hearth
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2
Environmentally friendly varnish

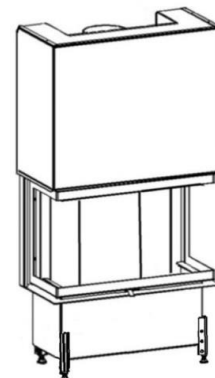

Technical parameters			
1	Nominal heat output	kW	10,5
2	Pressure required	Pa	12
3	Average efficiency	%	77
4	Average flue gas temperature	°C	267
5	Wood consumption	kg/h	3,3
6	Consumption of combustion air	m ³ /h	31,5
7	Emission of CO to 13% O ₂	%	0,1
8	Flue gas mass flow	g/s	11,8
9	Weight	kg	260
10	Required min. cross section for circulating air - INPUT	cm ²	325
11	Required min. cross section for circulating air - OUTPUT	cm ²	525
12	Three-component insulated chimney - active height 5 m	Ø cm	180
13	Character of building construction with fireplace insert	warm air convection	Yes
		heat storage without conv	No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass (SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Vermiculite lining (VO)
Lower hearth (ZO)
Vertical heat-storing panel (AZ)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk